



PHIYOND

***Commercial Refrigeration
Equipment***

Qingdao Phiyond Tech Co.,Ltd

Company Profile

PHIYOND

PHIYOND

Production base

Qingdao City

Phiyond is a professional tech company specialized in the field of commercial refrigeration planning & equipment.

Commercial Refrigeration Equipment



Chest Freezer



Island Freezer



Upright Display Freezer



Deli Showcase



Ice Cream Freezer



Upright Display Chiller



Multideck Open Chiller



Fresh Meat Showcase

Dealers

Phiyond has dealers all over the world and is recognized as one of the most famous refrigeration solution providers.

Our facilities

- We have complete modern facilities for foaming, metalworking, including roll sheet flattening, brushing, shearing, bending, grinding, polishing and powder coating machines.
- We have standard operating type testing lab.

Contact

Contact: Arthur Ren General Sales Manager
Email: arthuren@phiyond.com Mob: +86-1321003441
Factory Address: Boxing Economic Development Zone, Shandong Province, China.
International Trade Department Office: No. 128, Chongqing South Road, Shibei District, Qingdao City, Shandong Province, China.



Certification





Product Catalog



Chest Freezer-Small Type -----	01	Combined Island Freezer -----	07
Chest Freezer BD-X50 Series -----	02	Upright Display Chiller -----	08
Ice Cream Freezer H Series -----	03	Upright Display Freezer -----	09
Ice Cream Freezer Q Series -----	04	Multideck Open Chiller -----	10
European Style Deep Island Freezer Wide-body Series- 05		Deli Showcase -----	11
European Style Deep Island Freezer Narrow-body Series- 06		Fresh Meat Showcase -----	12



Chest Freezer Small Type



BD-105



BD-155

Features

- High-efficiency famous brand compressor, CFC-free high-efficiency refrigeration.
- Mechanical temperature controller, simple operation.
- Free switching between refrigeration and freezing.
- Integrated cabinet mouth, no splicing on the cabinet mouth, beautiful and easy to clean.
- Concealed one-piece handle, beautiful and practical.
- Balanced hinge design, 30°-90° multi-angle hover.
- Curved bottom design, reasonable use of cabinet space.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- No freeze-thaw within 100 hours after power failure, no worries about food preservation.

Product Model	BD-105	BD-155	BD-215	BD-305
Temperature Type	Single-temperature	Single-temperature	Single-temperature	Single-temperature
Number of Doors	1	1	1	1
External Dimension (WxDxH) (mm)	545*590*850	735*590*850	895*590*850	1125*590*850
Net Capacity (L)	98	152	197	252
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	30	34	38	46
G.W. (kg)	33	38	42	51
Packing Dimension (WxDxH) (mm)	635*585*880	775*635*880	935*635*880	1160*635*880
Loading Qty (1*40'HC)	226	186	148	112

Remark: Inverter and non-inverter scheme are optional



BD-215



BD-305



Chest Freezer Small Type



Single-temperature Type
BD-208 / BD-228 / BD-328

Product Model	BD-208	BD-228	BD-328	BCD-206	BCD-219	BCD-319
Temperature Type	Single-temperature	Single-temperature	Single-temperature	Double-temperature	Double-temperature	Double-temperature
Number of Doors	1	1	2	2	2	2
External Dimension (WxDxH) (mm)	955*550*805	1075*580*830	1295*635*830	955*550*805	1075*580*830	1295*635*830
Total Net Capacity (L)	189	229	311	175	217	294
Freezing Chamber Capacity (L)	189	229	311	130	125	165
Refr Chamber Capacity (L)	/	/	/	45	92	129
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Freezer: Min ≤-18 Refrigerator: 0-10	Freezer: Min ≤-18 Refrigerator: 0-10	Freezer: Min ≤-18 Refrigerator: 0-10
N.W. (kg)	35	58	65	36	60	68
G.W. (kg)	39	65	78	41	68	80
Packing Dimension (WxDxH) (mm)	1005*580*850	1130*650*880	1340*700*880	1005*580*850	1130*650*880	1340*700*880
Loading Qty (1*40'HC)	138	108	75	138	108	75

Remark: Inverter and non-inverter scheme are optional

Features

- High-efficiency famous brand compressor, CFC-free high-efficiency refrigeration.
- Mechanical temperature controller, simple operation.
- Free switching between refrigeration and freezing.
- Integrated cabinet mouth, no splicing on the cabinet mouth, beautiful and easy to clean.
- Concealed one-piece handle, beautiful and practical.
- Balanced hinge design, 30°-90° multi-angle hover.
- Curved bottom design, reasonable use of cabinet space.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- No freeze-thaw within 100 hours after power failure, no worries about food preservation.



Double-temperature Type
BCD-206 / BCD-219 / BCD-319



Chest Freezer BD-X50 Series



BD-350 / BD-450 / BD-550 / BD-650

Product Model	BD-350	BD-450	BD-550	BD-650	BD-850	BD-1050
Number of Doors	1	2	2	2	2	2
External Dimension (WxDxH) (mm)	1035*750*850	1275*750*850	1535*750*850	1815*750*850	2000*845*850	2125*925*850
Net Capacity (L)	270	354	445	543	713	874
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	54	60	75	82	88	95
G.W. (kg)	58	68	83	92	100	105
Packing Dimension (WxDxH) (mm)	1080*775*885	1320*775*885	1580*775*885	1860*775*885	2020*830*875	2165*900*875
Loading Quantity (PCS)(1*40'HQ)	98	80	66	56	42	36

Remark: Inverter and non-inverter scheme are optional



Features >>

- High-efficiency famous brand compressor, CFC-free high-efficiency refrigeration.
- 7-Setting mechanical temperature controller with electronic display.
- 75mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- Widened cabinet body design, easily accommodate boxed and large items.
- Stepped curved bottom design, orderly storage, stock up more.
- Balanced hinge design, 30°-90° multi-angle hover.
- No freeze-thaw within 120 hours after power failure, no worries about food preservation.



BD-850 / BD-1050



Ice Cream Freezer SD-151S

Features >

- Integrated cabinet mouth, no splicing, beautiful and easy to clean.
- White, grey or blue frame.
- 2 front & back move low-e glass lids.
- 4 adjustable legs or casters.



Product Model	SD-151S
External Dimension (WxDxH) (mm)	615*665*860
Net Capacity (L)	131
Climate Class	SN/N/ST/T
Temperature Range (°C)	Min ≤-25
N.W. (kg)	55
G.W. (kg)	59
Packing Dimension (WxDxH) (mm)	655*735*890
Loading Quantity (PCS) (1*40'HQ)	162





Ice Cream Freezer H Series

Features >

- Integrated cabinet mouth, no splicing, beautiful and easy to clean.
- Fully transparent glass door with good display effect.
- 7-Setting mechanical temperature controller with electronic display.
- 75mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation
- Curved one-piece handle, easy to push and pull.
- Multiple food baskets, classified storage.



Product Model	SD-H350	SD-H450	SD-H550
External Dimension(WxDxH) (mm)	1045*700*860	1245*700*860	1500*700*860
Net Capacity (L)	250	314	400
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Temperature Range (°C)	Min ≤-25	Min ≤-25	Min ≤-25
N.W. (kg)	53	65	78
G.W. (kg)	62	75	90
Packing Dimension (WxDxH) (mm)	1090*760*885	1290*760*885	1550*760*885
Loading Quantity (PCS)(1*40'HQ)	99	81	66



Ice Cream Freezer Q Series



profile



details

Features

- Cabinet mouth material is ABS+aluminium alloy, overall beautiful, good sealing, sturdy and wear-resistant.
- Fully transparent glass door with good display effect.
- 7-Setting mechanical temperature controller with electronic display.
- 75mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation.
- Curved one-piece handle, easy to push and pull.
- Multiple food baskets, classified storage.

Product Model	SD-Q350	SD-Q450	SD-Q550	SD-Q650	SD-Q750
External Dimension(WxDxH) (mm)	1035*680*850	1275*680*850	1535*680*850	1815*680*850	2000*680*850
Net Capacity (L)	202	267	337	413	466
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Temperature Range (°C)	Min ≤-25	Min ≤-25	Min ≤-25	Min ≤-25	Min ≤-25
N.W. (kg)	48	58	77	85	85
G.W. (kg)	54	66	86	95	105
Packing Dimension (WxDxH) (mm)	1080*740*880	1320*740*880	1580*740*880	1860*740*880	2045*740*880
Loading Quantity (PCS)(1*40'HQ)	99	81	63	54	45




European Style Deep Island Freezer Wide-body Series



Features >>

- Cabinet mouth material is ABS+PVC+aluminium alloy, overall beautiful, good sealing, sturdy and wear-resistant.
- Widened cabinet body design, easily accommodate boxed and large items.
- 7-Setting mechanical temperature controller with electronic display.
- 75mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation.
- Curved one-piece handle, easy to push and pull.
- Multiple food baskets, classified storage.

Product Model	SWD-1608	SWD-1808	SWD-2008	SWD-2010S	SWD-2210	SWD-2510S
External Dimension (WxDxH) (mm)	1600*800*860	1800*800*860	2000*800*860	2000*1005*860	2200*1005*860	2500*1005*860
Net Capacity (L)	561	645	728	920	989	1200
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	75	85	90	120	108	140
G.W. (kg)	90	100	105	138	128	166
Packing Dimension (WxDxH) (mm)	1650*850*890	1850*850*890	2050*850*890	2050*1060*890	2260x1060x890	2550*1060*890
Loading Qty (PCS) (1*40'HQ)	42	42	42	33	33	24

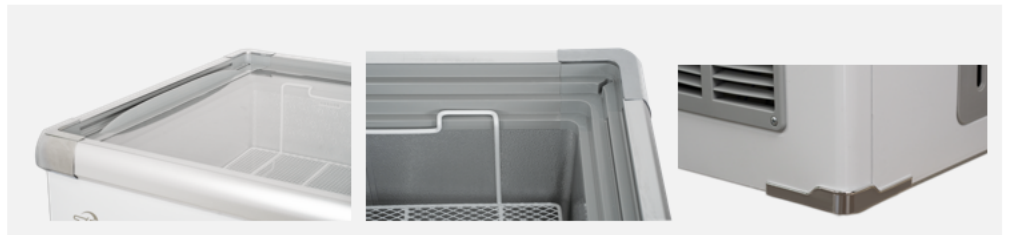



European Style Deep Island Freezer Narrow-body Series



Features >>

- Cabinet mouth material is ABS+PVC+aluminium alloy, overall beautiful, good sealing, sturdy and wear-resistant.
- Narrow cabinet body design, simple and beautiful, suitable for loading in container.
- 7-Setting mechanical temperature controller with electronic display.
- 75mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation.
- Multiple food baskets, classified storage.

Product Model	SWD-1207	SWD-1407	SWD-1707
External Dimension(WxDxH) (mm)	1185*700*840	1385*700*840	1685*700*840
Net Capacity (L)	328	428	528
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	50	65	80
G.W. (kg)	60	75	90
Packing Dimension (WxDxH) (mm)	1220*760*890	1420*760*890	1720*760*890
Loading Qty (PCS) (1*40'HQ)	84	72	60





Combined Island Freezer Single Arc Economical Type



Features

- Large cooling capacity famous brand compressor, CFC-free high-efficiency refrigeration.
- Detachable glass door, suitable for picking up large quantities of ingredients.
- 7-Setting mechanical temperature controller with electronic display or electronic thermostat are optional.
- 70mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation.
- Thickened deep food basket, easy to disassemble, more sturdy.
- Built-in LED light, soft light and clear, good display effect.



Position	End Cap	Middle	Middle	Middle	Middle
Product Model	ZD-AE1708	ZD-AM1508	ZD-AM1808	ZD-AM2008	ZD-AM2508
External Dimension (WxDxH) (mm)	1650*760*850	1500*760*850	1800*760*850	2000*760*850	2500*760*850
Net Capacity (L)	485	420	528	598	776
Cooling Mode	Direct-cooling	Direct-cooling	Direct-cooling	Direct-cooling	Direct-cooling
Climate Class	SN,N,ST	SN,N,ST	SN,N,ST	SN,N,ST	SN,N,ST
Defrosting	Manual	Manual	Manual	Manual	Manual
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	85	82	92	98	109
G.W. (kg)	92	90	99	105	121
Packing Size (WxDxH) (mm)	1695*775*885	1545*775*885	1845*775*885	2045*775*885	2545*775*885
Loading Quantity (PCS)(1*40'HQ)	42	65	42	42	24



Combined Island Freezer Automatic Defrosting Type



Features

- Large cooling capacity famous brand compressor, CFC-free high-efficiency refrigeration.
- Automatic defrosting, high efficiency, labor saving.
- Detachable glass door, suitable for picking up large quantities of ingredients.
- Electronic thermostat, precise temperature control.
- 70mm thickened thermal insulation layer, reducing air conditioning loss and save electricity.
- Thickened pre-coated aluminum sheet inner liner, anti-corrosion and anti-rust, prolong life.
- LOW-E tempered glass, effective anti-condensation.
- Built-in LED light, soft light and clear, good display effect.



Position	End Cap	Middle	Middle	Middle	Middle
Product Model	ZD-BE1809	ZD-BM1509	ZD-BM1809	ZD-BM2109	ZD-BM2509
External Dimension (WxDxH) (mm)	1825*865*935	1455*865*935	1805*865*935	2105*865*935	2505*865*935
Net Capacity (L)	610	490	610	735	900
Cooling Mode	Direct-cooling	Direct-cooling	Direct-cooling	Direct-cooling	Direct-cooling
Climate Class	SN,N,ST	SN,N,ST	SN,N,ST	SN,N,ST	SN,N,ST
Defrosting	Automatic	Automatic	Automatic	Automatic	Automatic
Temperature Range (°C)	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18	Min ≤-18
N.W. (kg)	121	90	121	132	150
G.W. (kg)	146	129	146	160	190
Packing Size (WxDxH) (mm)	1870*920*1045	1520*920*1045	1870*920*1045	2170*920*1045	2570*920*1045
Loading Quantity (PCS)(1*40'HQ)	39	45	39	39	24



Upright Display Chiller



Features >>

- Air cooling cycle, extremely fast cooling without frost.
- Electronic thermostat for more precise temperature control.
- Double-layer LOW E tempered glass, effectively prevent condensation.
- Aluminum alloy automatic return door, labor-saving and energy-saving.
- Thickened adjustable shelves, strong bearing capacity, easy to place and make full use of space.
- 50mm thickened thermal insulation layer.
- Built-in 12V high brightness LED light, safer, better display effect.
- Back mounted auto evaporation water tray.
- Nylon swivel casters with stronger carrying capacity.
- Removable sealing strip, good toughness, easy to disassemble and washable.

Product Model	LSC-1076	LSC-1676
Number of Doors	2	3
Shelf	4-Layer (8Pcs)/5-Layer (10Pcs) Split-type with Dividers	4-Layer (12Pcs)/5-Layer (15Pcs) Split-type with Dividers
External Dimension(WxDxH) (mm)	1215*740*2050	1830*740*2050
Inner Dimension (WxDxH) (mm)	1115*590*1474	1730*590*1474
Net Capacity (L)	952	1477
Cooling Mode	Air Cooling	Air Cooling
Climate Class	SN,N,ST	SN,N,ST
Temperature Range (° C)	1-10	1-10
N.W. (kg)	104	149
G.W. (kg)	119	165
Packing Dimension (WxDxH) (mm)	1255*760*2100	1870*760*2100
Loading Quantity (PCS)(1*40'GP)	28	19



Upright Display Freezer



Features >>

- Air cooling cycle, extremely fast cooling without frost.
- Electronic thermostat for more precise temperature control.
- Copper tube aluminum fin evaporator.
- Triplex Hollow Electric-heating LOW E tempered glass, effectively prevent condensation.
- Aluminum alloy automatic return door, labor-saving and energy-saving.
- Thickened adjustable shelves, strong bearing capacity, easy to place and make full use of space.
- 70mm thickened thermal insulation layer.
- Built-in 12V high brightness LED light, safer, better display effect.
- Bottom with auto evaporation water tray.
- Nylon swivel casters with adjustable feet. more stable with stronger carrying capacity.
- Removable sealing strip, good toughness, easy to disassemble and washable.

Product Model	LSLD-1307	LSLD-1907
Number of Doors	2	3
Shelf	4-Layer (8Pcs)/5-Layer (10Pcs) Split-type with Dividers	4-Layer (12Pcs)/5-Layer (15Pcs) Split-type with Dividers
External Dimension(WxDxH) (mm)	1250*730*2100	1875*730*2100
Inner Dimension (WxDxH) (mm)	1110*600*1560	1735*600*1560
Net Capacity (L)	905	1413
Cooling Mode	Air Cooling	Air Cooling
Climate Class	SN,N,ST	SN,N,ST
Temperature Range (° C)	Min ≤-18	Min ≤-18
N.W. (kg)	125	165
G.W. (kg)	145	190
Packing Dimension (WxDxH) (mm)	1290*770*2230	1915*770*2230
Loading Quantity (PCS)(1*40'GP)	27	18



Multideck Open Chiller

Features

- Adopt Boyang integrated condensing unit, with high energy efficiency and large cooling capacity.
- Air cooling cycle, extremely fast cooling without frost.
- Electronic thermostat for more precise temperature control.
- Copper tube aluminum fin evaporator, thickened tube, large evaporation area.
- The upper and lower cabinets are made of painted aluminum alloy profiles, which are not easy to deform and have a long service life.
- The side panels are double-layer tempered glass, fixed by aluminum profiles.
- 4 layers of adjustable shelves, made of 1.0m thick electrostatic spray steel plate, strong pressure resistance, each layer is equipped with multiple thickened brackets.
- Top with mirror glass.
- Buckle hanging type deceleration high transparent aluminum clip night curtain.
- Built-in 8500K LED light, better display effect.
- Nylon swivel casters with stronger carrying capacity, adjustable feet for easy fixation.

Product Model	LFG-1008Y	LFG-2008Y	LFG-2508Y
External Dimension(WxDxH) (mm)	1000*800*2000	2000*800*2000	2500*800*2000
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	2-8	2-8	2-8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Thermostat Type	Digital	Digital	Digital
Shelf Standard Configuration (Tier*Section)	4*2	4*2	4*2
Packing Dimension (WxDxH) (mm)	1100*900*2100	2100*900*2100	2600*900*2100
Loading Quantity (PCS) (1*40'HQ)	26	13	8







Deli Showcase Direct Cooling

Product Model	SSG-Z-A1500 SSG-Z-B1500	SSG-Z-A2000 SSG-Z-B2000	SSG-Z-A2500 SSG-Z-B2500
External Dimension(WxDxH) (mm)	1500*1050*1200	2000*1050*1200	2500*1050*1200
Cooling Mode	Direct Cooling	Direct Cooling	Direct Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	2~8	2~8	2~8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Lid/Front Door Type	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door
Packing Dimension (WxDxH) (mm)	1550*1100*1250	2050*1100*1250	2550*1100*1250
Loading Quantity (PCS)(1*40'HQ)	28	20	16




 Type-A

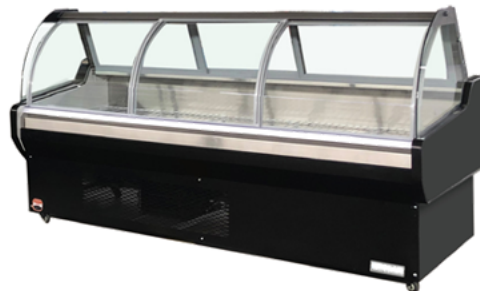

 Type-B



Deli Showcase Air Cooling

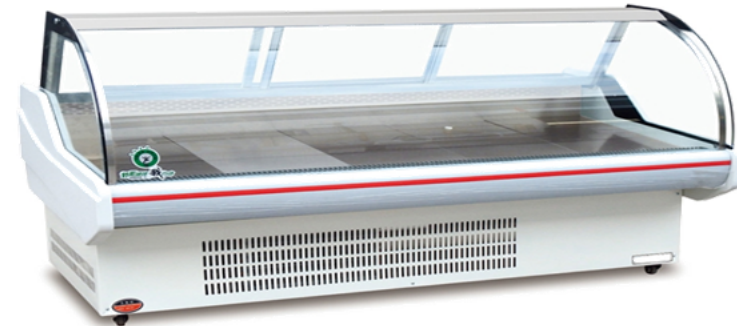

➤ Type-A



➤ Type-B

Product Model	SSG-F-A1500 SSG-F-B1500	SSG-F-A2000 SSG-F-B2000	SSG-F-A2500 SSG-F-B2500
External Dimension(WxDxH) (mm)	1500*1050*1200	2000*1050*1200	2500*1050*1200
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~8	-2~8	-2~8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Lid/Front Door Type	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door
Packing Dimension (WxDxH) (mm)	1550*1100*1250	2050*1100*1250	2550*1100*1250
Loading Quantity (PCS)(1*40'HQ)	28	20	16



Deli Showcase Air Cooling



Type-C



Type-D



Product Model	SSG-F-C1500	SSG-F-C2000	SSG-F-C2500
External Dimension(WxDxH) (mm)	1500*1100*1200	2000*1100*1200	2500*1100*1200
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~8	-2~8	-2~8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Lid/Front Door Type	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door	Stationary Lid/Sliding Door
Packing Dimension (WxDxH) (mm)	1550*1150*1250	2050*1150*1250	2550*1150*1250
Loading Quantity (PCS)(1*40'HQ)	28	20	16

Product Model	SSG-F-D1500	SSG-F-D2000	SSG-F-D2500
External Dimension(WxDxH) (mm)	1500*1050*1190	2000*1050*1190	2500*1050*1190
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~8	-2~8	-2~8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Lid/Front Door Type	Lift Door	Lift Door	Lift Door
Packing Dimension (WxDxH) (mm)	1550*1100*1300	2050*1100*1300	2550*1100*1300
Loading Quantity (PCS)(1*40'HQ)	28	20	16



Fresh Meat Showcase Direct Cooling



Type-A



Type-C



Type-B


Product Model	SXG-Z-A1500 SXG-Z-B1500 SXG-Z-C1500	SXG-Z-A2000 SXG-Z-B2000 SXG-Z-C2000	SXG-Z-A2500 SXG-Z-B2500 SXG-Z-C2500
External Dimension(WxDxH) (mm)	1500*1050*880	2000*1050*880	2500*1050*880
Cooling Mode	Direct Cooling	Direct Cooling	Direct Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~8	-2~8	2~8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Packing Dimension (WxDxH) (mm)	1550*1100*980	2050*1100*980	2550*1100*980
Loading Quantity (PCS) (1*40'HQ)	28	20	16



Fresh Meat Showcase Air Cooling



Type-A

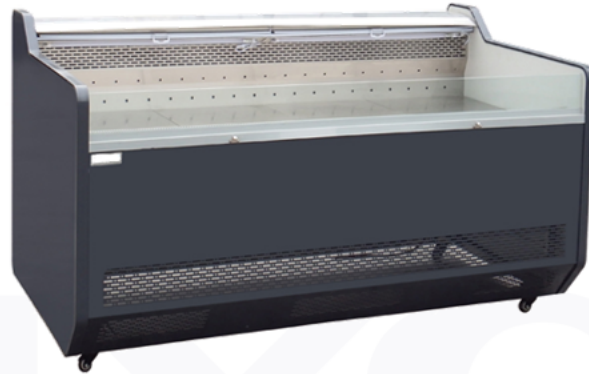

Type-B



Type-C

Product Model	SXG-F-A1500 SXG-F-B1500	SXG-F-A2000 SXG-F-B2000	SXG-F-A2500 SXG-F-B2500
External Dimension(WxDxH) (mm)	1500*1050*930	2000*1050*930	2500*1050*930
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~-8	-2~-8	-2~-8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Packing Dimension (WxDxH) (mm)	1550*1100*1030	2050*1100*1030	2550*1100*1030
Loading Quantity (PCS)(1*40'HQ)	28	20	16

Product Model	SXG-F-C1500	SXG-F-C2000	SXG-F-C2500
External Dimension(WxDxH) (mm)	1500*1100*900	2000*1100*900	2500*1100*900
Cooling Mode	Air Cooling	Air Cooling	Air Cooling
Climate Class	SN/N/ST	SN/N/ST	SN/N/ST
Temperature Range (° C)	-2~-8	-2~-8	-2~-8
Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting	Off-Cycle Defrosting
Packing Dimension (WxDxH) (mm)	1550*1150*1000	2050*1150*1000	2550*1150*1000
Loading Quantity (PCS)(1*40'HQ)	28	20	16